

2020 Model Year Standard Specification



Principal Dimensions

Length overall:

32'9" (9.99m)

Beam:

11'6" (3.5m)

Draught:

2'10" (0.87m) unloaded

Berths:

2 - 4

Fuel capacity:

150 gallons / 180 US gallons (680 litres)

Displacement (light):

5.93 tonnes / 6.65 US tons (6,029kg)

Water capacity:

48 gallons / 58 US gallons (220 litres)

Black waste capacity:

27 gallons / 21 US gallons (80 litres)

Engines & Performance

2 x Volvo Penta V6-240 petrol,
sterndrive (240mhp each):
33 knots (estimated)

2 x Volvo Penta V8-430 petrol,
sterndrive (430mhp each):
48 knots

Type approval:
CE Category C


2 x Volvo Penta D3-220 diesel,
sterndrive (220mhp each):
32 knots

2 x Mercruiser V8 8.2 430 petrol,
sterndrive (430mhp each):
48 knots (estimated)


Max. persons capacity:
8

Deck Plans

Main Deck

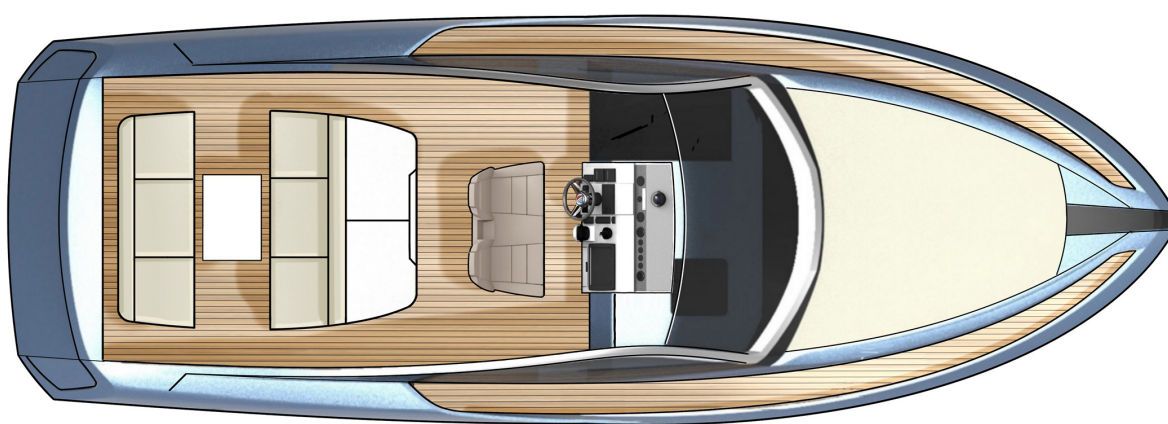

Lower Deck

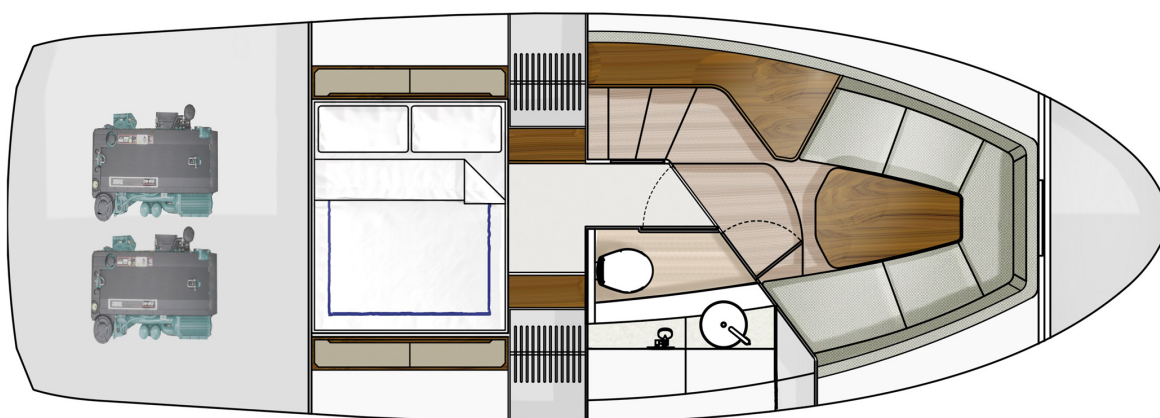

Deck

Anchor light	Horn
Anchor chain (8mm x 30m)	Hot & cold water handheld transom shower
Anchor chain locker	Mooring lines (6 x 2.5m)
Anchor winch remote controls	Moulded non-slip deck surface
Anchor winch (electric)	Navigation lights
Bilge pump switches with integral operating warning lights & audible alarms	Recessed self-draining area on foredeck for sunbed cushions
Carbon fibre ensign staff	Rubbing strake
Chain stopper (10mm)	Self-stowing stainless-steel anchor (10kg)
Controls for engine bay fire extinguisher system	Stainless steel pop-up bow, spring & stern cleats
Fenders (x6)	Stainless steel stemhead roller
Foredeck sunbed cushion cover	Side access doors
Fuel filler	Toughened, single piece, curved glass windscreen
Fuel gauges	Water filler
High capacity emergency manual bilge pump system	Waste outlet

Helm Position

Compass	Full engine monitoring including;
7" display screen	digital tachometers, oil pressure
Drinks holders	gauges, temperature gauges, audible
Electronic single-lever throttle & gear controls for port & starboard engines	alarms, engine hour meters, helm position indicator, compass
	Garmin VHF 315i marine radio
	Twin helm seats – fixed height
	USB socket

Electrical Systems

All 240V, 12V circuits with circuit protection
 Electrical sockets
 Heavy duty circuit breakers
 Isolating switches to all batteries

12 Volt

Batteries x 2
 - 1 for domestic services
 - 1 for engine starting
 Battery crossover system

240 Volt

Polarity check & earth leakage protection system
 Regulated battery inverter/charger
 Shore power supply

Cockpit

Audio unit with Bluetooth connectivity
 2 x 8" waterproof speakers
 Bar unit with sink & fridge
 Boat hook
 Engine bay access hatch
 Forward & aft facing seating with stowage under
 Life raft stowage
 Manual bilge pumps

Moulded non-slip deck surface
 Step for side deck access
 Stowage bins
 Transom safety hoops
 Transom washboard
 Tonneau cover
 USB socket

Hullform & Construction

Antifouling protection to hull
 Deep 'V' hull design by J&J Design
 Design, layout & detailing by Alberto Mancini Yacht Design and the Fairline Yachts Design Studio
 Full length moulded spray deflectors
 Hull & deck colour – White

Integrally moulded engine bearers
 Polyurethane foam cores throughout deck for strength & thermal insulation
 Resin infused hull & internal liner
 Transverse & longitudinal strengthening stringers throughout hull

Saloon

Access to head
 Companionway timber steps
 First aid kit
 Fixed height table
 Electrical distribution panel
 Fire extinguisher (manual)

'V' shape sofa
 LED ceiling lights
 Lockers (overhead)
 Sliding companionway door to cockpit
 Stowage lockers under seating

Mid Cabin	Double bed LED ceiling lights Opening porthole	2 x half height hanging lockers 4 x trinket lockers
Head	Automatic shower tray pump-out system Electric silent-flush freshwater toilet Extractor fan Full set of bathroom fittings	Full standing-height shower with adjustable shower head Mirrored cabinet doors Skylight Vanity unit locker & basin with hot & cold pressurised water
Engines & Sterngear	Automatic engine bay fire extinguisher system Electric trim tabs	Seacocks on all inlets/outlets below waterline
Fuel System	Emergency fuel shut-off valves Water separators & fuel filters	Twin fuel tanks – 680 litre capacity
Freshwater System	Automatic, pressurised supply Calorifier hot water system – 60 litre capacity	Water tank – 160 litre capacity
Black Waste	Holding tank – 80 litre capacity	
USA Specifications In addition to or in lieu of those listed above	Voltage - 110V 60Hz	

Whilst every effort is made to keep all sales literature up to date, it should not be regarded as an infallible statement of current specifications & does not constitute an offer for the sale of any particular boat. We continually seek to improve the specification & design of our boats, so alterations & upgrades to specifications take place continually.

Appointed dealers are not agents of Fairline Yachts Ltd & are not authorised to commit Fairline Yachts Ltd by any express or implied undertaking or representation.

Performance Figures: Power quoted in our literature for diesel inboard engines is crankshaft output.

Performance Estimates: Performance estimates are given in good faith but are in no way guaranteed for any particular model. Dirt on the bottom of the boat, damage to the propellers, engine tuning, external water & air temperatures & the weight of crew, fuel & water carried can all adversely affect performance. For those & other reasons we can give no performance guarantees