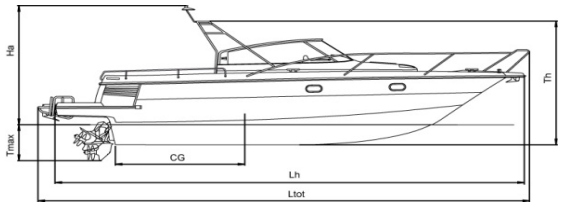
NIMBUS 34 NOVA



MAX PEOPLE:	**10**	**pers**	
CE CATEGORY:	**B**		
WEIGHT (MLCC):	**5645**	**kg**	**12445 lb**
MAX TOTAL LOAD (MMTL):	**1980**	**kg**	**4365 lb**
BERTHS:	**2+2**		
FUEL CAPACITY:	**600**	**l**	**158 USg**
WATER CAPACITY:	**120**	**l**	**31 USg**
WASTE CAPACITY:	**70**	**l**	**18 USg**



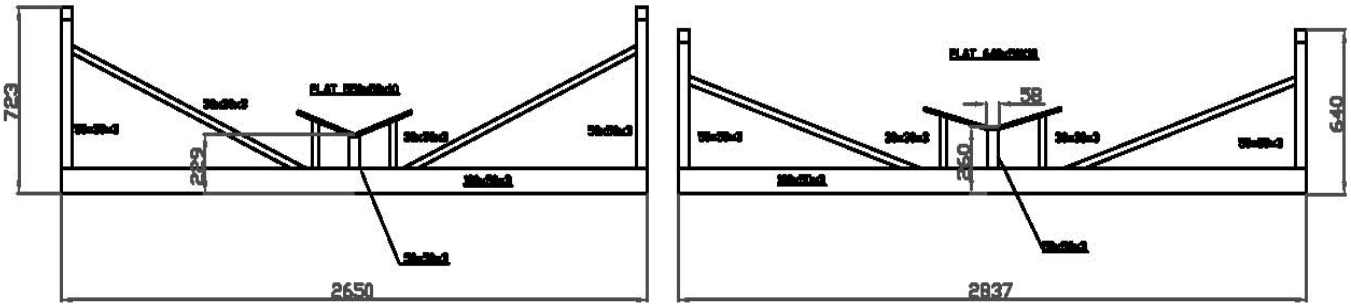
OVERALL LENGTH (Lmax):	**11,66**	**m**	**38,3 ft**
LENGTH OF HULL (Lh):	**11,09**	**m**	**36,4 ft**
OVERALL BEAM (Bmax):	**3,32**	**m**	**10,11 ft**
BEAM OF HULL (Bh):	**3,28**	**m**	**10,9 ft**
DRAUGHT (Tmax):	**1,08**	**m**	**3,6 ft**
AIR DRAUGHT (Ha):	**3,27**	**m**	**10,8 ft**
AIR DRAUGHT, FOLDED MAST:		**m**	
TRANSPORT HEIGHT (Th):	**3,55**	**m**	**11,7 ft**
TRANSP HEIGHT IN CRADLE:	**3,90**	**m**	**12,9 ft**
CENTRE OF GRAVITY (CoG):	**2,80**	**m**	**9,2 ft**

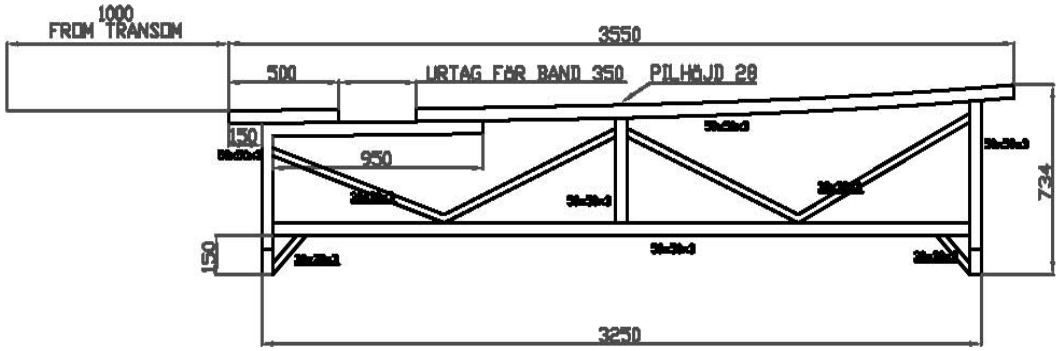
Engine:	**2*Volvo Penta D4-260**		**Gear:**	**DPH 1:1,85**		**Propel**	**G8**
RPM	**SPEED (kn)**	**l/h**	**USg**	**l/Nm**	**USg/Nr**	**Range (Nm)**	
2500	**25,6**	**52**	**13,6**	**2,0**	**0,53**	**250**	
3000	**32,9**	**68**	**18,0**	**2,1**	**0,55**	**243**	
3400	**38,6**	**100**	**26,9**	**2,6**	**0,69**	**195**	

Engine:	**2*Volvo Penta D4-300**		**Gear:**	**DPH 1:1,76**		**Propel**	**G9**
RPM	**SPEED (kn)**	**l/h**	**USg**	**l/Nm**	**USg/Nr**	**Range (Nm)**	
2400	**27,3**	**53**	**14,0**	**1,9**	**0,50**	**259**	
3000	**36,2**	**82**	**21,7**	**2,3**	**0,61**	**222**	
3550	**41,4**	**110**	**29,1**	**2,7**	**0,71**	**189**	

Engine:	**Volvo Penta D6-400**		**Gear:**	**DPH 1:1,59**		**Propel**	**G4**
RPM	**SPEED (kn)**	**l/h**	**USg**	**l/Nm**	**USg/Nr**	**Range (Nm)**	
2400	**19,5**	**32**	**8,5**	**1,7**	**0,45**	**304**	
3000	**28,5**	**48**	**12,6**	**1,7**	**0,45**	**302**	
3600	**35,5**	**79**	**21,0**	**2,2**	**0,58**	**226**	

Nimbus Boats AB carry out continous product development, so the information on this sheet may vary between boats. Differences in equipment levels, loading conditions etc affect the speed and fuel consumption figures. The Range figures should only serve as an indicator and is based on 84% of max fuel capacity and optimized conditions. Range is greatly affected by wind, wave and current, driving style, boat condition etc.


723
229
2650
58
350
640
2837


1000
FROM TRANSOM
3550
500
URTAG FÖR BAND 350
PILHÖJD 20
150
950
150
734
3250

N35N-908A